



Horquilla-Bola Ref. **HB**

Ref.	Diam. Tornillo	Carga de Rotura (daN)	Ref.
HB-11	M-12	5.500	GN-11
HB-16	M-16	10.000	GN-16

Grillete Recto Ref. **GN**



Grapa de Amarre Ref. **GA**

Ref.	Diam. Conductor mm		Carga de Rotura (daN)	Ref.
	Mín.	Máx.		
GA-1	4	10	2.500	GS-1
GA-2	9,4	16	5.500	GS-2
GA-3	14	20	8.000	GS-3
GA-4	18	25,5	10.500	GS-4


Grapa de Suspensión Ref. **GS**



Anilla Bola Ref. **AB**

Ref.	Acoplamiento de	Carga de Rotura (daN)	Ref.
	Rótula Normalizado		
AB-11	CEI-11	5.500	R-11 / R-11P
AB-16	CEI-16	9.000	R-16 / R-16P

Rótula Corta **R** – Rótula Larga **R**P**

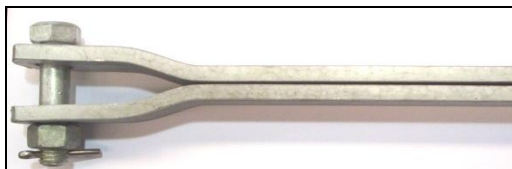

Alargadera Doble **ALD** – Simple **AL**

Ref.	Longitud mm	Carga de Rotura (daN)
AL(D)-100	100	6.000 - 18.000
AL-200	200	6.000 - 18.000
AL(D)-300	300	6.000 - 18.000
AL(D)-400	400	6.000 - 18.000
AL(D)-500	500	6.000 - 18.000